





Product Introduction:

- Certified torque accuracy of $\pm 3\%$.
- Ratcheting Assurance Mechanism assures unmatched repeatability. Crafted from the highest quality aircraft-grade materials for
- unmatched strength and durability AQ Grade 7075-T6 Light Alloy. Hard coat piston sleeve.
- Anodized finish for corrosion resistance and durability.
- Heavy Duty Ratchet, unique single-piece drive pawl design for
- unrivaled accuracy and tool longevity.
- Components manufactured to ISO 9001:2008 and EN/JISQ/AS9000:2004 standards.

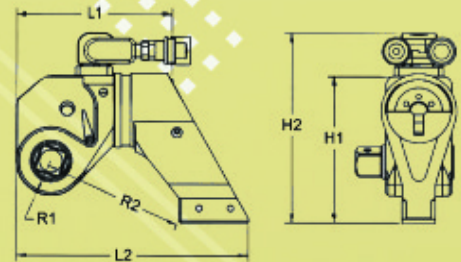

产品简介:

- 认证扭力精度 $\pm 3\%$ 。
- 精密的片驱动棘轮、棘爪设计机制，保证了无与伦比的可重复性。
- 壳体采用航空级AQ7075-T6轻合金材料精制而成，零偏载设计，全面加强结构强度、韧性并保证了无与伦比的耐久性。
- 专利活塞减震系统，硬涂层活塞套，消除了冲击或震动的伤害，延长使用寿命，节省维修成本。
- 表面阳极处理，耐腐蚀性和耐久性更强。
- 元件制造符合ISO 9001:2008EN和JISQ/AS9000：2004标准。

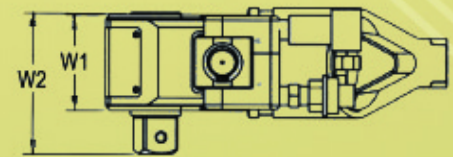

技术参数

型号	FT1	FT3	FT5	FT8	FT10	FT25	FT50
最小扭矩(N.m)	184	423	760	1093	1500	3355	7346
最大扭矩(N.m)	1842	4235	7600	10931	15004	33555	73463
驱动轴	3/4"	1"	1-1/2"	1-1/2"	1-1/2"	2-1/2"	2-1/2"
L1(mm)	122.2	160.0	180.3	195.6	223.5	299.7	374.7
L2(mm)	176.5	243.6	285.0	319.3	352.8	470.4	546.1
H1(mm)	92.2	125.2	146.1	165.1	199.1	243.8	381.0
H2(mm)	125.7	171.5	195.8	215.6	231.4	293.4	426.7
W1(mm)	50.3	66.8	80.0	90.7	100.3	133.4	177.8
W2(mm)	72.0	98.8	118.1	129.3	142.5	190.0	235.0
R1(mm)	24.9	28.7	39.6	44.7	49.5	66.0	76.2
R2(mm)	97.8	135.4	156.2	176.8	195.3	287.0	317.5
重量(Kg)	2.0	3.9	6.9	10.5	12.6	32.8	51.0